

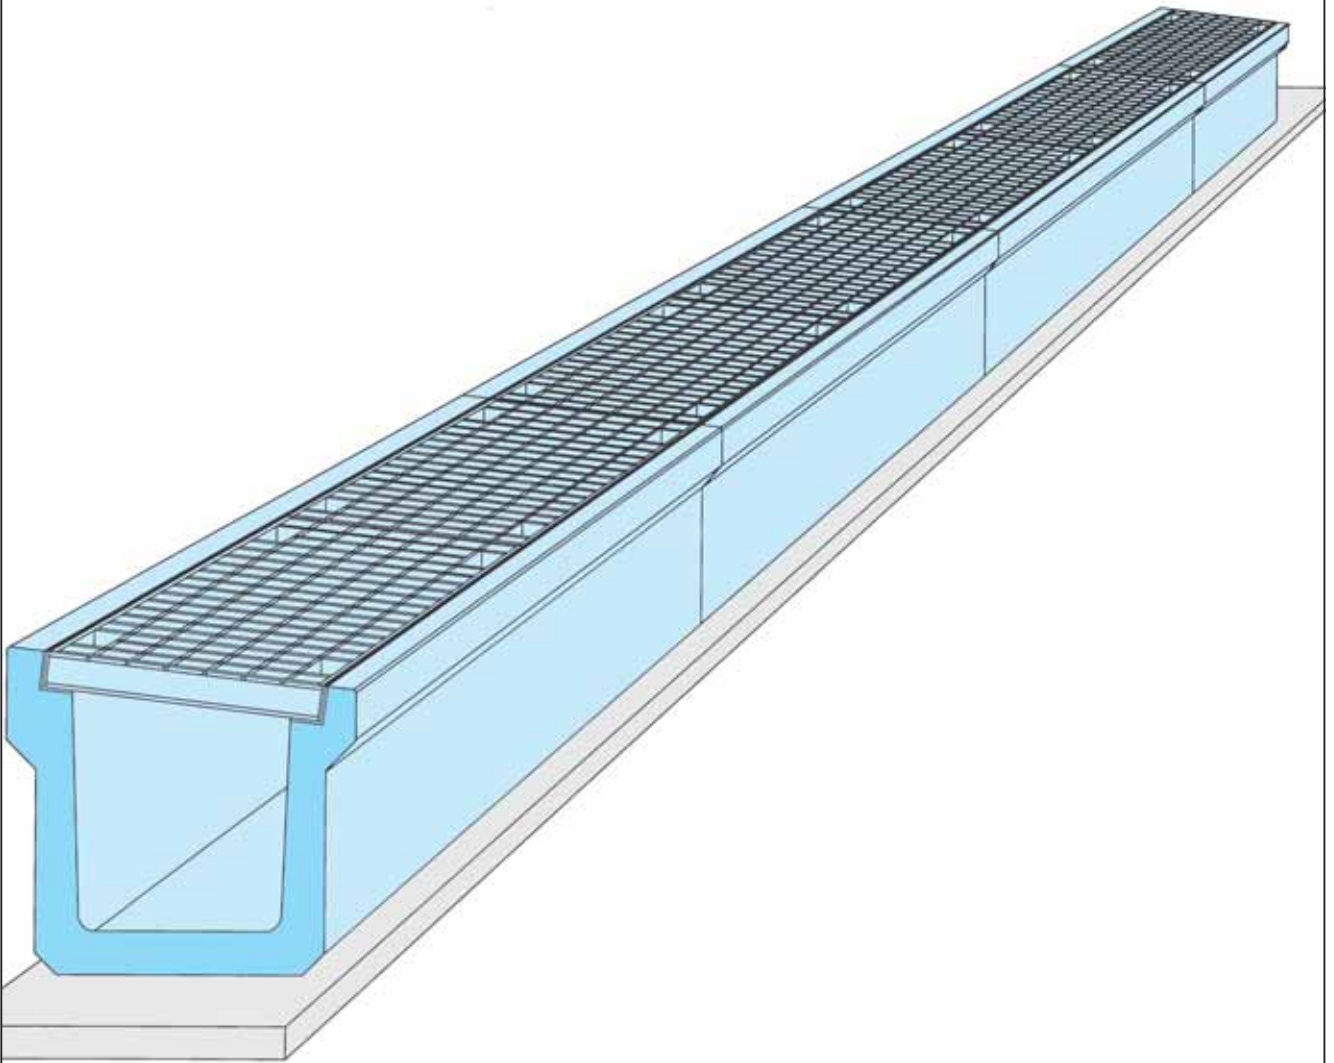


縦断勾配側溝 DU グレート

(特徴)


- 道路の縦断勾配に合わせたグレーチング側溝
- 路面の勾配変化が無く安全です。
- グレーチングはボルト固定で盗難防止

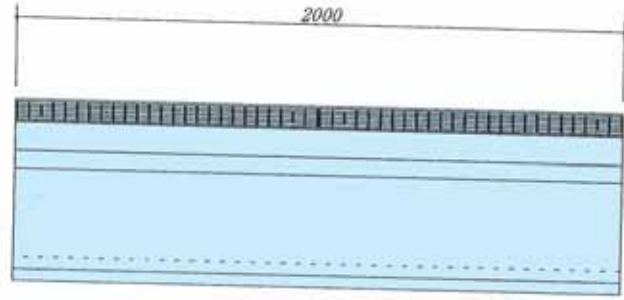

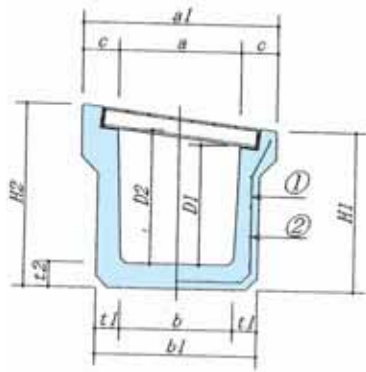

寸法表

呼び名	勾配 (%)	寸 法										配 筋		重量 (kg)		
		a	a'	b	b'	c	D ¹	D ²	d	t ¹	t ²	H ¹	H ²		①	②
300×300	4	300	540	280	440	120	300	312	55	80	80	430	452	φ 4.5-22	φ 4.0-11	525
	6							318				428	460			
	8							324				425	468			
	10							330				423	477			
	12							336				421	486			
	14							342				418	494			
300×350	4	300	540	280	440	120	350	362	55	80	80	480	502	φ 4.5-22	φ 4.0-13	583
	6							368				478	510			
	8							374				475	518			
	10							380				473	527			
	12							386				471	536			
	14							392				468	544			
400×400	4	400	640	370	530	120	400	416	65	80	80	530	556	φ 6.0-24	φ 5.0-14	620
	6							424				528	566			
	8							432				525	576			
	10							440				523	587			
	12							448				521	598			
	14							456				518	608			
400×450	4	400	640	370	530	120	450	466	65	80	80	580	606	φ 6.0-24	φ 5.0-16	678
	6							474				578	616			
	8							482				575	626			
	10							490				573	637			
	12							498				571	648			
	14							506				568	658			
500×500	4	500	750	460	620	125	500	520	75	80	80	650	680	φ 6.0-24	φ 5.0-16	743
	6							530				648	693			
	8							540				645	705			
	10							550				643	718			
	12							560				640	730			
	14							570				638	743			
500×550	4	500	750	460	620	125	550	570	75	80	80	700	730	φ 6.0-29	φ 5.0-18	803
	6							580				698	743			
	8							590				695	755			
	10							600				693	768			
	12							610				690	780			

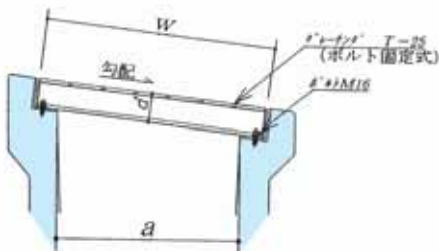

グレーチング寸法

a	d	w	L	参考重量 (kg)
300	55	400	995	33.1
400	65	500	995	45.3
500	75	600	995	61.4